



# The instructions of coaxial power supply :

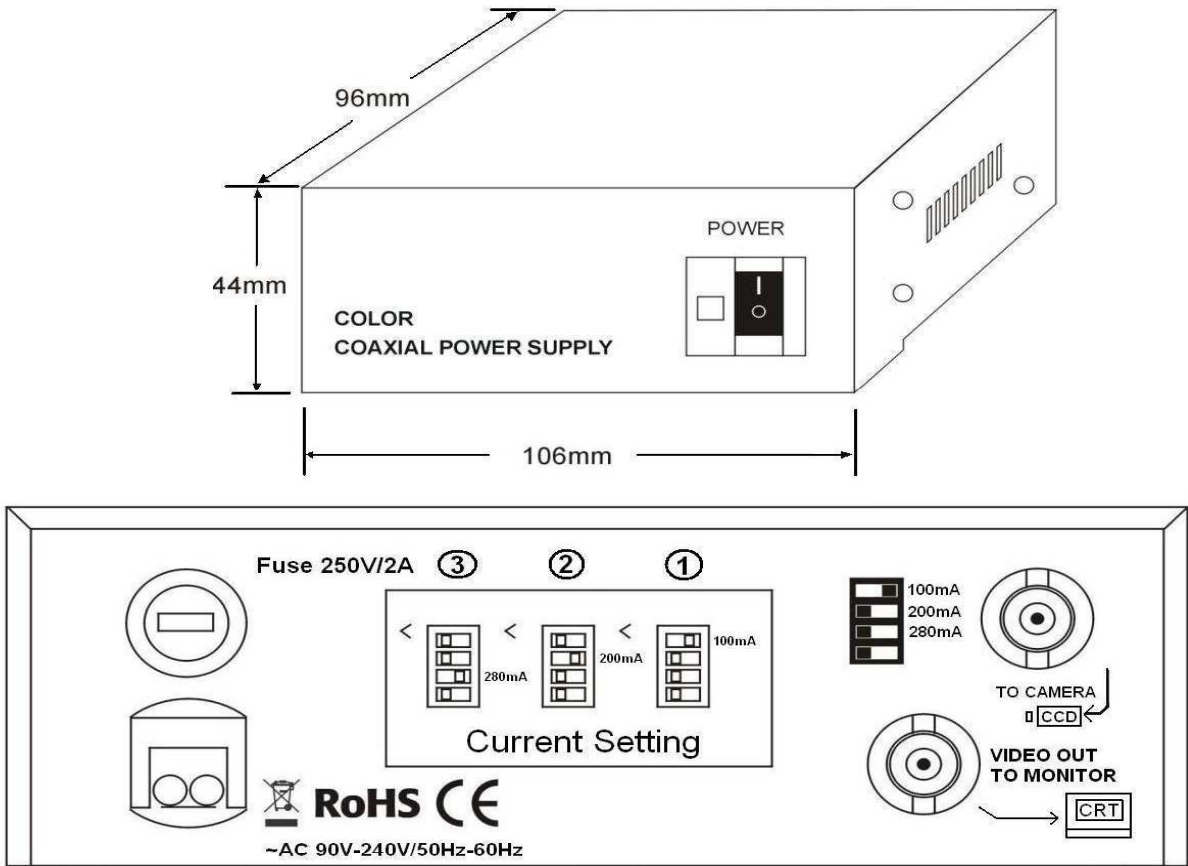


## Caution :

*Inappropriate current setting may shorten the product life cycle.*



①

If the camera constant current is 100mA, please switch to 100mA as ①.



②

If the camera constant current is 200mA, please switch to 200mA as ②.



③

If the camera constant current is 280mA, please switch to 280mA as ③.

## 1 Way Coaxial cable Power Supply

To Camera	VS1.0.Vp-p/75 ohm
To Monitor	VS1.0.Vp-p/75 ohm
Camera Power Supply System	DC Constant Current Over Coaxial cable
Maximum Cable Length	RG-58U 200M 【Copper wire impedance 20Ω (ohm)】 RG-59U 300M 【Copper wire impedance 20Ω (ohm)】 RG-6U 500M 【Copper wire impedance 20Ω (ohm)】
Operation Temperature	Temperature:-15℃ to +55℃
Humidity	Less Than90%
Power Consumption (approx.)	3.5 W
Power Requirements	110V AC / 60 or 50Hz ; 230V AC / 50 or 60Hz
Dimensions	106mm(L) × 44mm(H) × 96mm(D)
Weight (approx.)	620g