



VENTUS PRINT & APPLY

Ventus 920VL Turning Applicator

VENTUS MAKES MARKING EASY

Ventus Print & Apply System is designed and developed by KLINGER Finland. Due to the capability of real-time labelling the information as well as the product can easily be changed. Different attachment alternatives enable Ventus to label any product regardless of the industry your company is operating. Its modular structure gives an opportunity to customize your company a unique labelling solution with minimal costs.

In addition, its small and compact size makes it easy to install the system in different applications. Ventus fully combines the cost-effective price with reliability, endurance, flexibility and user-friendliness. Ventus even speaks your own language as well as standard English.

Key Features


- » Versatile: front, back, side, top and over edge labelling
- » Small and compact
- » Easy to adapt
- » Reliable
- » User-friendly
- » Settings can be easily modified
- » Two versions available: basic version and full Windows PC version
- » Robust metal frame



PRODUCT DESCRIPTION

Ventus 920VL applies the last-printed label to the moving product with a turning application head. It follows the surface of the product, which ensures that the label is carefully and thoroughly attached to the product. The structure of the application head is designed in such a way that the same head can be used to apply various-sized labels without any additional adjustments. Ventus 920VL is the solution when the labelling has to be versatile, for example where packages of varying sizes are labelled on the same line and the location of the label varies.

APPLICATION POSITIONS

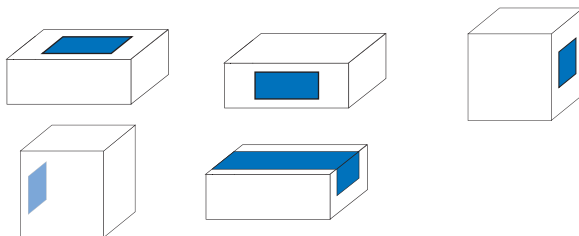

Ventus 920VL can apply a label on top, to the side, in front or to the back of a product, as well as over an edge.

Technical Specifications

Label size:	Width: 25-150 mm Length: 40-250 mm
Speed:	Max 20 labels/minute (label size 25 x 40 mm)
Compressed air:	~ 6 bar
Printer options:	All major printer brands available both thermal and thermal transfer, such as Sato, Zebra and Datamax O'Neil (200, 300 and 600 dpi)
Dimensions:	Height: 700 mm Width: 500 mm Depth: 350 mm (without printer)
Weight:	Frame: 29 kg Printer: approximately 12 kg (depending on model)

RECOMMENDED APPLICATIONS

We have delivered Ventus Print & Apply solutions to many different industries ie. food, chemistry, cosmetics, building materials and wood industries.