





CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN

CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE COVER
NOT USER SERVICEABLE PARTS INSIDE
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL

Dimensions

Part name & Dimension

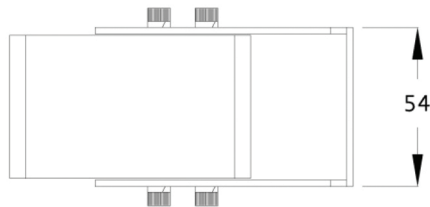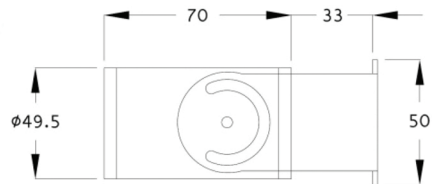

Accessories



Mounting screws


Screws

L-wrench



Option : extension urethane cable


Installation

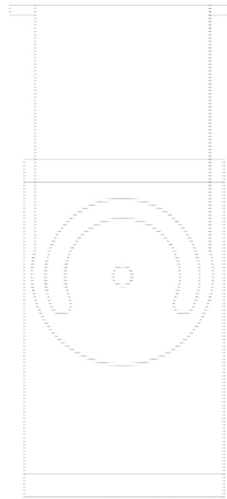

1. Adjust view angle using the bracket hole before the mounting screws are fixed.

2. Loosen up the screws of the bracket for adjusting view angle and tighten up the bracket on the wall or ceiling

Cable

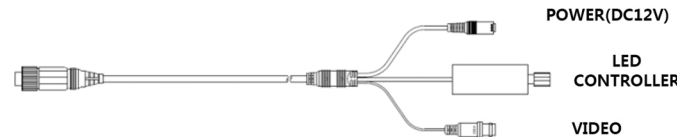

CAUTION! Please use regulated power supply DC12V 300mA
Reverse Polarity Protection

Features

- 1/2.9" Sony Exmor CMOS image sensor
- Full HD (1920x1080) Resolution
- AISI 316 Grade Stainless steel body & 3-axis bracket
- Auto Compensation & Long range transmission
- Excellent Low illumination performance
- F = 1.6 4.0mm megapixel lens
- 15pcs of white LEDs
- Available brightness of White LEDs by switch
- 3D DNR (Digital Noise Reduction)
- SENS-UP
- WDR
- Weather proof/ IP-68 rating
- DC12V

Specifications

| | |
|-----------------------|--|
| Image Sensor | 1/2.9" Sony Exmor CMOS image sensor |
| Resolution | 1080P |
| Scanning System | Progressive |
| Video Output | TVI: 1080P, 720P Analog: NTSC/ PAL CVBS |
| S/N Ratio | More than 50dB (AGC off) |
| Min. Illumination | Color : 1.0 lux, BW : 0.5 lux, Color DSS : 0.002 lux, BW DSS : 0.0008 lux |
| D-WDR | Off/0~8 |
| SENS-UP | Off/X2 - X30 |
| Backlight | Off/BLC/HSBLC |
| DNR | Off/Low/Middle/High |
| Privacy Mask | 4 Masks |
| Motion Detection | Off/On |
| Power Source | DC12V ±10% |
| Power Consumption | Max 4.0 Watt |
| Operating Temperature | -20°C to 60°C |
| Operating Humidity | 10% to 85% |
| Lens | F = 1.6 4.0mm MP lens |
| Dimension/mm | φ49.5 X 70(L) |
| Weight/g | 760 |

All specification and pictures are subject to change without notice to improve quality.