


Application Story

Aerospace

Jet engine turbine blade gauging using Digital Probes

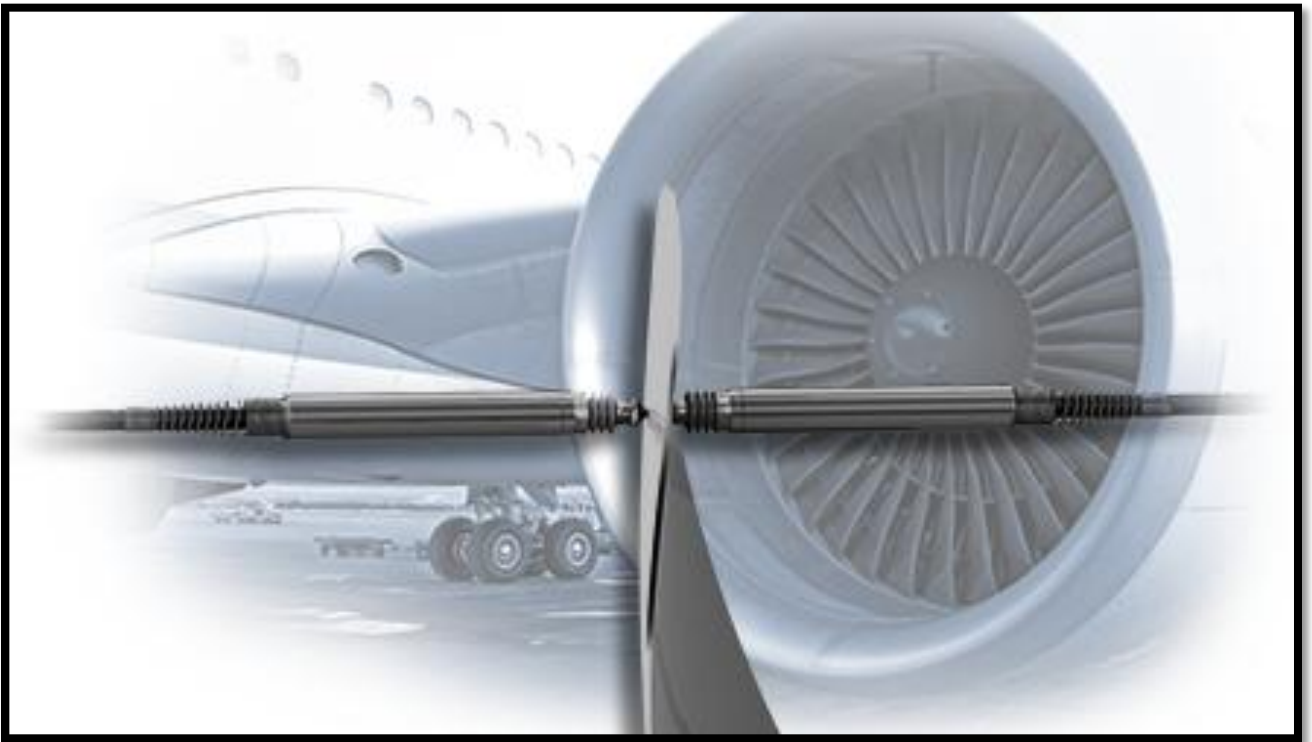

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametek.com

The Product

The standard DP range of Digital Spring Push Probes has justifiably become the work horse of the gauging industry. Very high resolution, excellent linearity and high data speed come as standard. Long life precision bearings, and an IP65 rating ensure that probes maintain their performance for millions of cycles.



Range:	2 to 20 mm
Accuracy:	Up to 0.05% of reading
Resolution:	Up to 0.01 μm
Repeatability:	Up to 0.15 μm

The Challenge


Specialists in the investment casting and machining of alloy metals, such as aluminium and titanium, which are primarily used for jet aircraft engines and airframes, have to measure the dimensions of the blades after surface grinding.

After casting, the turbine blades undergo surface grinding to complete the collaboration of surfaces. The dimensions of the blade post-grind then need to be accurately measured as the initial proportions from the casting will have changed slightly. A precision process application is required to conform to final specification requirements (dimensional accuracy and surface finish).



The Solution

Using the Digital Spring Push Probes (DPs), the measurements from the desired locations on the turbine can be taken, and fed into the digital readout (SI5500). Measurement data from the SI5500 is transmitted via the unit's RS232 output to a PC running a statistical process control system. This data is then used to monitor the performance of the grinding process and the quality of the finished parts, providing traceability records from the start of the process to the finished part..

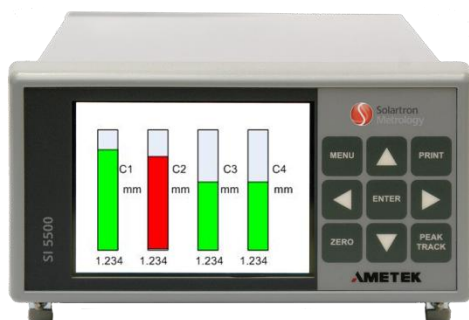

The SI5500 can interface up to 31 Orbit® 3 Modules and supports Digital Probes, Linear Encoders and Encoder Input Modules. It gives the user the option to select data display formats and program metrology functions.

The SI5500 features an intuitive, menu-driven multiple-channel display which can be programmed to display readings, set Limits/Alarms, Peak Hold, Track or act as a Data Logger. The screen can be set-up as single channel or multiple channel configurations. Users can construct mathematical formulae and algebraic equations to get a wide variety of results for their gauging applications.

United Kingdom - Head Office

Solartron Metrology
Steyning Way
Bognor Regis
West Sussex
PO22 9ST
Tel: +44 (0) 1243 833333
Fax: +44 (0) 1243 833322
Sales.solartronmetrology@ametek.com

France

Solartron Metrology
Rond-point de l'Espine des Champs
Buroplus - Bat. D
Elancourt 78990
Tel: +33 (0)1 30 68 89 50
Fax: +33 (0)1 30 68 89 59
france.solartronmetrology@ametek.com

Germany

Ametek GmbH
Solartron Metrology Division
Rudolf-Diesel-Strasse 16
40670 Meerbusch
Tel: +49 (0) 2159 9136 500
Fax: +49 (0) 2159 9136 505
vertrieb.solartron@ametek.de

India

Ametek Instruments India Private Limited
1st Floor, Left Wing
Prestige Featherlite Tech Park
Plot #148, EPIP II Phase
Whitefield, Bengaluru 560 066
Karnataka, India
Tel: +91 80 6782 3200
Fax: +91 80 6782 3232

USA

Solartron Metrology
USA Central Sales Office
915 N. New Hope Road, Suite C
Gastonia, NC 28054
Tel: +1 800 873 5838
Fax: +1 704 868 8466
usasales.solartronmetrology@ametek.com

China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd
No. 155 Puhui Road
Ju Ting Economic Development Zone
Shanghai 200131
Tel: +86 21 5763 2509
Fax: +86 21 5866 0969 Ext. 261/262
china.solartronmetrology@ametek.com



Solartron Metrology

Precision Driven

Offices worldwide
Agent and distributor details
available at
www.solartronmetrology.com



Q09540

Solartron pursues a policy of continuous development. Specifications in this document may therefore be changed without notice.

Datasheet 52624
Issue 61
EDCR20423

AMETEK®
ULTRA PRECISION TECHNOLOGIES

Precision. Quality. Reliability

www.solartronmetrology.com • sales.solartronmetrology@ametek.com