

SST810 Dynamic Inclinometer



辉格科技
Vigor Technology

SST810 Dynamic Inclinometer


Features

- No drift, dynamic tilt measuring
- Lowest cost
- Built in MEMS tri-axis accelerometer and tri-axis gyroscope
- dynamic accuracy $\pm 2^\circ$ RMS
- Highest refresh rate 1000Hz
- X/Y/Z angular rate & acceleration data available
- Autonomous working, do not need any external auxiliary
- Mounted wherever needed



Description

SST810 dynamic inclinometer is specially designed for motion application, which is an inertial product measures dynamic roll/pitch angle with high update rate. SST810 has concentrated Vigor years of application experiences and technologies of tilt measurement, combines with inertial navigation technology, to achieve max. 1000Hz update rate.

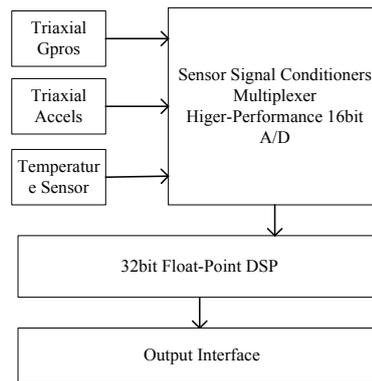

SST810 Internal structure

Traditional inclinometer based on accelerometer and electrolyte principles. In dynamic motion such as rapid movement vehicle and vessel, the measurement result will be affected by extra axial acceleration and centripetal acceleration, so that valid angle measurement data can't identify effectively, and accuracy is unable to guarantee. SST810 adopts advanced inertial navigation technology to exactly measure dynamic pitch/roll angle long term, without aiding of GPS etc..





Application

Ship, ROV, engineering machinery, rail transportation, automotive, robot, radar positioning, weapon platform, photoelectric platform, logistics, etc


Performance

Roll/pitch rang	$\pm 90^\circ/\pm 90^\circ$
Dynamic accuracy	$\pm 2.0^\circ\text{RMS}$
Refresh rate	50Hz~1000Hz
Resolution	0.05°
Acceleration range	MEMS, $\pm 2g$
Angular rate range	MEMS, $\pm 300^\circ/s$
Tilt Measurement axis	2 axis
Power supply	9~36VDC
Power consumption	$\leq 1.5W$, depends on measurement accuracy and refresh rate
Output interface	RS232、RS422、CAN
Output data	roll/pitch, tri-axis acceleration, tri-axis angular rate, Quaternion, Euler
Operation temperature range	-40~85°C
Storage temperature range	-40~85°C
MTBF	≥ 100000 h/times
Shock	500g@1ms, three-axis, half- sine
Vibration	4grms, 20~2000Hz
Protection	IP67
Connecting	Meet to MIL-C-26482
Dimensions	90x60x42.5mm
Weight	300g(without connector and cable)

Dimensions (mm)

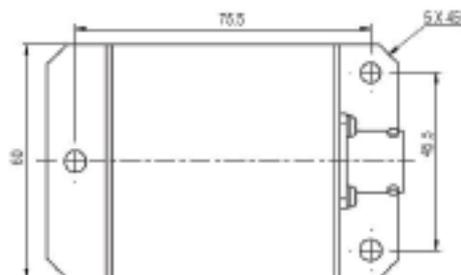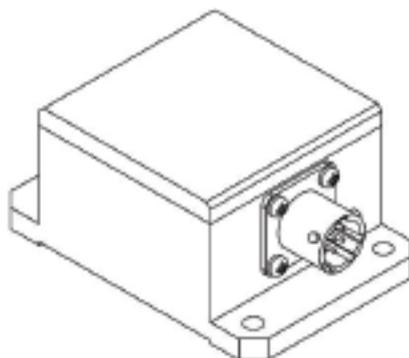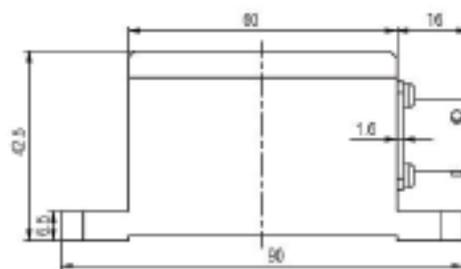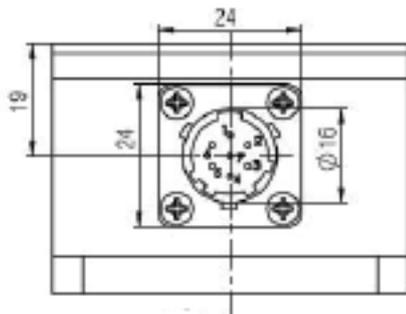

Wiring



Connector socket
(View from outside)

Pin	RS422	RS232	CAN
1	Power+	Power+	Power+
2	Power GND	Power GND	Power GND
3	Signal GND	Signal GND	Signal GND
4	RS422-TXD+	NC	CAN_H
5	RS422-TXD-	NC	CAN_L
6	RS422-RXD+	TXD	NC
7	RS422-RXD-	RXD	NC

Ordering

Product type	Description
SST810-G0	With RS232 output
SST810-G2	With RS422 output
SST810-G3	With CAN2.0A/B output
SST810-OEM	No housing



Shanghai Vigor Technology Development Co., Ltd.

No.289-4, Bisheng Road, Pudong New District Shanghai China 201204

Hotline. +86-400-0505-021

Tel. +86-21-5840-4921

Fax. +86-21-5835-4552

Email: sales@vigordigital.com

Web: www.vigordigital.com