

KLINGER TOPLINE K44

Graphite Yarn With Blended Graphite and PTFE Lubricant



A high purity, high performance, graphite based multiservice packing for both valve and pump applications.

The base graphite yarn means the packing has excellent capability in dynamic applications and the additional graphite lubricant acts as a further blocking agent to improve sealing.

Klinger TopLine packing range introduced to provide users with gland sealing products that meet today's demanding services, offering effective and trouble-free sealing during application. To achieve this goal we have selected the best materials and the best production methods.

GENERAL PROPERTIES


- » Virtually resistant to all media over an extensive range of pressures and temperatures.
- » Klingerlock braided yielding a packing that is consistently dense with excellent volumetric stability.
- » Although frequently employed on its own, the packing can be used as part of a specialised composite set in conjunction with either K3222 packing or K35 die-formed rings. Within these sets K44 acts as both supporting anti-extrusion rings and wiper rings.

AVAILABILITY

SIZE (MM)	LENGTH (M)	SIZE (MM)	LENGTH (M)
3.2 x 3.2	8	12.5 x 12.5	8
5.0 x 5.0	8	14.0 x 14.0	8
6.5 x 6.5	8	16.0 x 16.0	8
8.0 x 8.0	8	19.0 x 19.0	8
9.5 x 9.5	8	22.0 x 22.0	8
11.0 x 11.0	8	25.0 x 25.0	8

- » Also Available with additional PTFE lubricant; K44PL

APPLICATION GUIDELINES

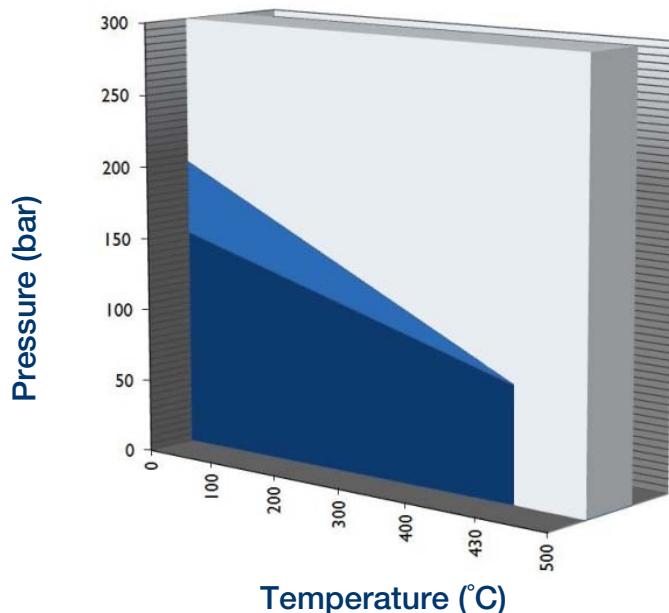

- Caution: May be suitable but essential that you refer to Klinger for advice
- Usually Satisfactory, but suggest you refer to Klinger for advice
- Usually Satisfactory to Use Without Reference

NOTE: Chemical compatibility must be considered in all cases.

TYPICAL SPECIFICATIONS

PROPERTIES	VALUES
Min. Temperature	-240°C
Max. Steam Temperature	650°C
Max. Temperature	430°C
Max. Static Pressure	150 Bar
Max. Dynamic Pressure	8 Bar
Max. Speed	30 m/s
pH Range	0-14

This packing should not be subjected to maximums of temperature, pressure and speed simultaneously.

HEAD OFFICE
KLINGER Ltd
 Wharfedale Road
 Euroway Trading Estate
 Bradford BD4 6SG

Tel: 01274 688 222
 Fax: 01274 688 549
www.klinger.co.uk
enquiries@klingeruk.co.uk



FM 602916

FM 10571

OHS 570166

EMS 570165

KLINGER RUNCORN
 Tel: 01928 577 030
 Fax: 01928 575 233
KLINGER SOUTHAMPTON
 Tel: 02380 611 855
 Fax: 02380 610 360
KLINGER ABERDEEN
 Tel: 01224 772 962
 Fax: 01224 772 953

KLINGER IMMINGHAM
 Tel: 01469 575 289
 Fax: 08449 676 779
KLINGER MIDDLESBROUGH
 Tel: 01642 220 289
 Fax: 01642 220 290
KLINGER GRANGEMOUTH
 Tel: 01324 472 231
 Fax: 01324 482 111