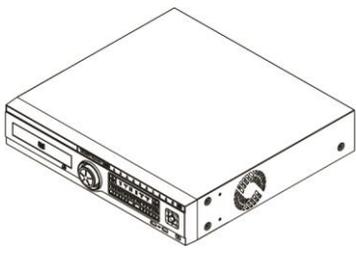









Components

Please check the below to make sure you have every component.

			
DVR	Remote Control & Batteries	Mouse	power cord
			
PoC adaptor (*)	Rack Bracket & Screws	SW & user guide CD	Installation and user guide Quick installation guide

* Only available in PoC models.

Before using the product,


Please read the below carefully before using this product.

- ✓ Don't use the product outdoors.
- ✓ Don't spill water or liquid on connecting part of the product
- ✓ Don't place heavy objects or damage the product.
- ✓ Do not pull out the power plug forcibly.
- ✓ Do not disassemble the product by yourself.
- ✓ Don't use in excess of stated power I/O range.
- ✓ Use a certified power cord only.
- ✓ Use ground power plug.

A-class Equipment (Broadcasting Communication Equipment for Industrial use only)

Users should understand this is A-class broadcasting communication equipment for industrial use only and must not be used for home use.

Connecting different components

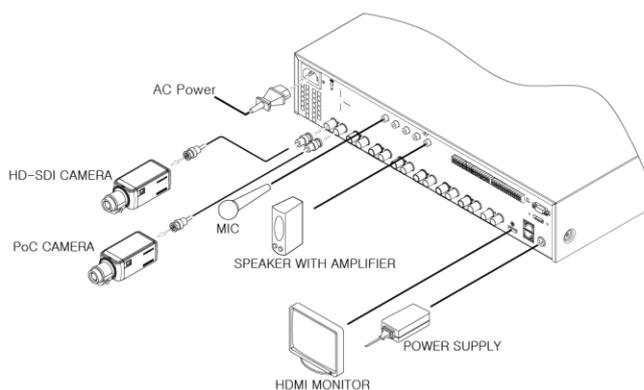

Connecting to a monitor

Please check the monitor resolution before connecting to a monitor.

✓ Using HDMI Port : 1920 x 1080p

<Warning>

You must use a standard camera that conforms to HD-SDI standard.

Use of HDMI certified cable is recommended when connecting to a HDMI Monitor.

Connecting to a camera

Use the recommended Coaxial cable and connect a HD-SDI camera to a DVR as shown in the picture.

1080p camera is only available and can not use other resolution's cameras. DVR can not record video from unsupported cameras.

PoC Camera

If PoC cameras and PoC adaptor are connected to a DVR, DVR supplies necessary power to cameras through coaxial cable, and DVR can control cameras through coaxial cable without RS-485 cable installation.

Recommended Cables

Cable Category	HD-SDI transmit distance	Applications
5C2V	about 90M	Analog cable
4C-FB(T), 4C-HFB(T), RG59	about 140M	High-foamed cable (Double or Trishield recommended)
5C-FB(T), 5C-HFB, L-6CHD, RG6	about 180M	Cable for HD-SDI
5C-HFBT	about 200M	Cable for HD-SDI


* Depends on manufacturer and models.

<warnings>

- ✓ Transmission distance will be affected by cable types and installation site environment
- ✓ Transmission distance of cables shows differences based on the attenuation factor at 750MHz. (dB/100m < 25dB is recommended)
- ✓ Foamed or high-foamed trishield cable is recommended.
- ✓ Coaxial cable and BNC connector must have 75Ω impedance.
- ✓ Careful to cable deformation due to high pressure over the cable.
- ✓ Don't pull the cable with too much force.
- ✓ During the arrangement of the coaxial cables at the rear of the rack, if tied too tightly, inside/outside insulator of cable could be deformed, so tie it loosely within cable's curvature range.

Record Settings

Menu → Record → Record

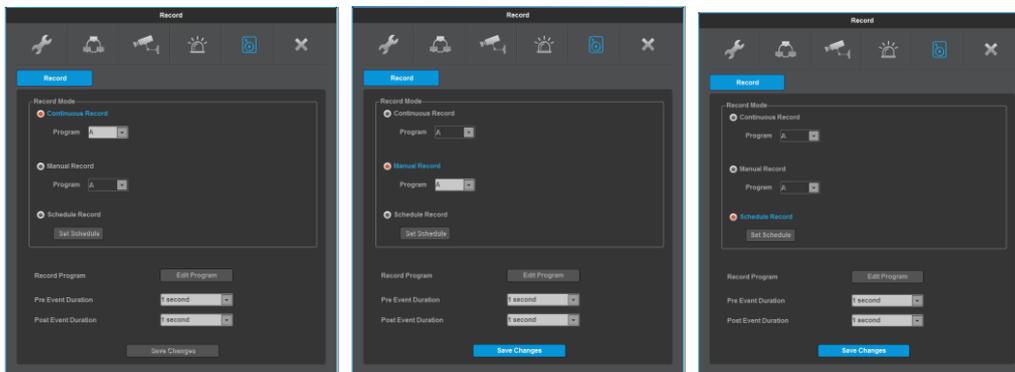

[Continuous Recording]

[Manual Recording]

[Scheduled Recording]

Continuous Recording

Continuous Recording will automatically start once DVR booting is complete and will continue to record/event record according to selected recording program.

Manual Recording

Use REC button on the front panel to start/finish recording. Manual/event recording can be performed according to selected recording program.

<reference>

If you choose manual recording, please check the REC LED after you exit the DVR menu. If the LED did not turned on, please push the REC button on the front panel to start recording.

Scheduled Recording

Scheduled recording will begin according to a schedule(date/time/program) preset by a user. In Scheduled recording mode, users can set date/time.




Program Settings

Menu → Record → Program


Set camera's resolution, recording resolution, framerate and recording quality at "Program" menu of record setting.

<Reference>

How to check the recording status : "REC LED" on front panel turns on during DVR recording, and DVR shows [SCHEDULE], [MANUAL] or [CONTINUOUS] sign on the status bar. "REC LED" will turn off if DVR recording is not in progress.

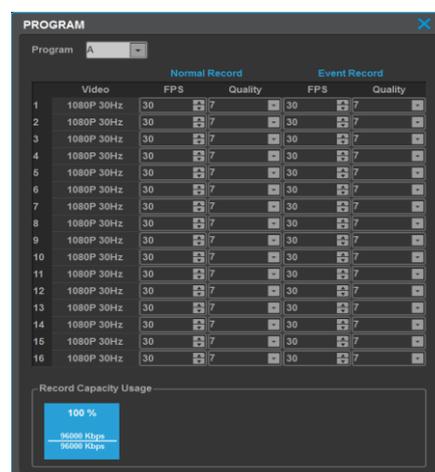


Connecting to Network

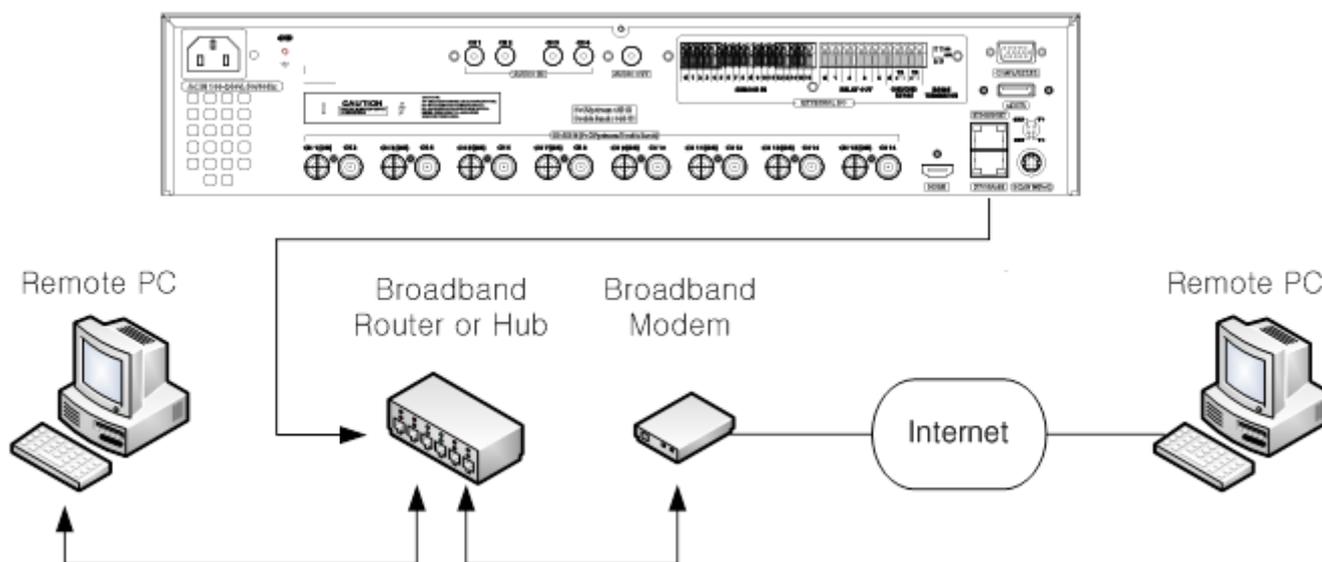

Network Settings

Menu → Network → Network

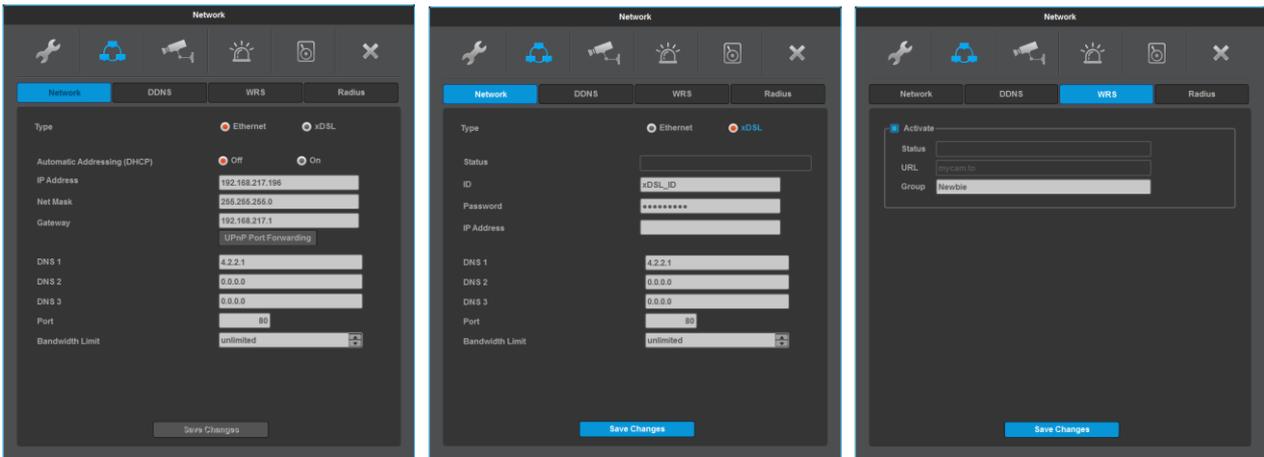

Ethernet

Choose network type to Ethernet, and enter IP address, Netmask, Gateway, DNS which were received from network administrator.

xDSL(PPPoE)

Choose network type to xDSL and move to xDSL menu.

Enter ID and Password which were given by internet provider. If properly connected to xDSL, DVR will show a message to confirm the connection.

DDNS

If DVR is using dynamic IP and you use the DDNS service, you can always connect to DVR regardless of IP address change of DVR. To use DDNS, enter domain name directly. Please visit to WEBGATE's DDNS service site (www.mycam.to) for the details.

WRS

If DVR is using dynamic IP and you use WRS service, CMS can automatically find the IP address of your DVR and connect to it. To use this service, assign a GROUP ID at WRS menu. Because CMS searches a DVR by GROUP ID or Serial Number, please assign your GROUP ID as a unique one.

Auto port forwarding


When using Internet Sharing device(Router) which supports UPnP, this function will let users to have an easy access to many DVRs that are connected to the internet sharing device.

- (1) Set DHCP ON for DVR(A) and DVR(B).
- (2) Connect a DVR to an Internet Sharing Device and confirm that a public IP address is allocated.
- (3) Set 81 to DVR(A) and 82 to DVR(B) as DVR port number.
- (4) Configure UPnP function of Internet Sharing Device as "ON".
- (5) Configure UPnP Port Forwarding function of DVR as "ON".
- (6) Confirm Port Forwarding Status message is changed from "Not Available" to "Port Mapping is OK".
- (7) If a user accesses to Internet Sharing Device using port 81, it connects to DVR(A), and if accessed using port 82, it connects to DVR(B).

Manual port forwarding

User has to set a port manually in a router in case using a router which doesn't support UPnP function.


- (1) Connect to a router by default IP address.
- (2) Go to "Port range forward" setup page.
- (3) Set DVR IP address & Port of DVR connected to the router then check 'Enable' and save.

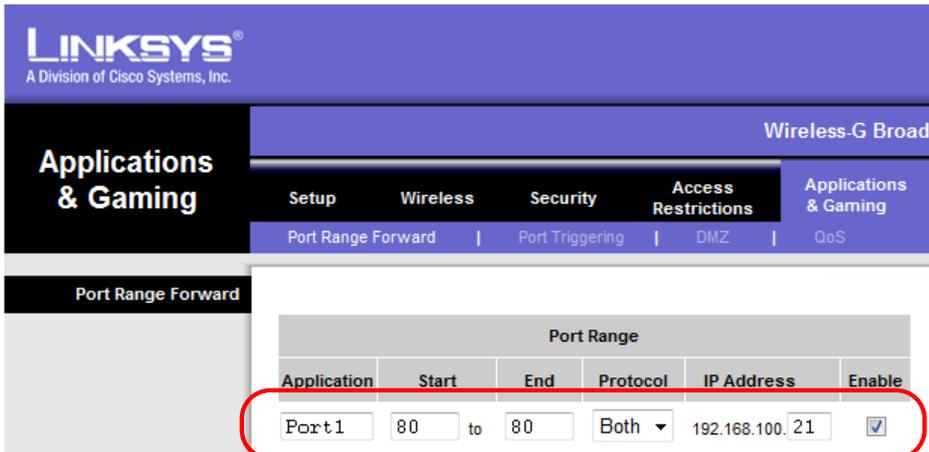

(4) Using a PC which is connected to the same router, Connect the DVR with IP address and port number. (DVR default port : 80)



(5) Check the router's internet address (Public IP address) to access to the DVR from external network.

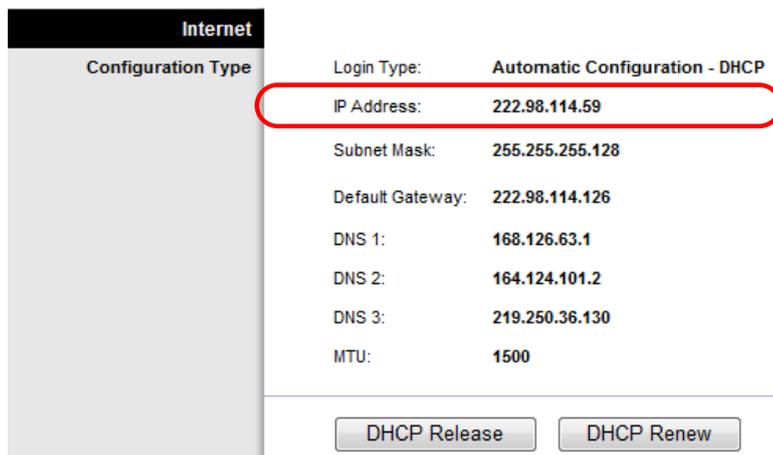

(6) Connect to the DVR using router's IP address and DVR's port number.



(7) WebViewer Installer will run once you successfully connect to a DVR. And you can view WebViewer login page once WebViewer Installation is complete.



(8) Enter USER ID & PASSWORD to access to the live monitoring page.